




**QI TECH INC.**  
**a subsidiary of Changshun**

QI TECH INC.  
7410 Ambassador Row, Dallas, Texas 75247  
www.qitechinc.com

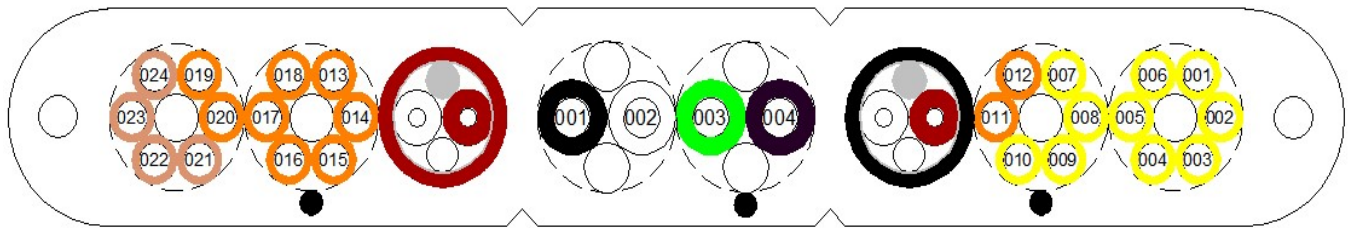

## PRODUCT INFORMATION

### BASIC CABLE INFORMATION:

**Part Number:** DLB2518  
**Type and Specification:** ETP 4-14AWG+24-18AWG+2-2-20AWG  
**Packing Information:** 300 meter per reel  
**Cable Color:** Gray.

### APPLICATION:

Elevator suspension cable for indoor and panoramic elevators.

### INSTALLATION:

To comply with the correct installation procedures please refer to the Changshun Product Catalog which is available separately, for the DLB2518 cable, secure it with the PX25500AV4-A nylon cable clamp during mounting.

### THE COMPOSITION STRUCTURE AND SPECIFIC INFORMATION OF CABLE ARE AS FOLLOWS:

Component Core Wire	4/14AWG	24/18AWG	2 Shielded Pairs /20 AWG	Strength Member
Material				Aircraft Steel Wire Rope
Conductor Material	TR Soft Copper Wire	TR Soft Copper Wire	TR Soft Copper Wire	
Insulation Material	PVC Class 4	PVC Class 4	PVC Class 4	
Shielded Material			Aluminum Foil	
Inner Sheath Material			PVC Class 1.5	
Outer Sheath Material			PVC Class 1.5	

Note: The diameter of the wire rope is  $\phi$  2.0mm.

### THE CONDUCTOR NUMBERING ARE AS FOLLOWS:

Size	Conductor Number And Color
14 AWG	Black 1, White 2, Green 3, Purple 4
	Yellow 001 to 010
18 AWG	Orange 011 to 020
	TAN 021 to 024
Shielded Pair /20 AWG	Red/White pair

### THE MECHANICAL PROPERTIES:

Maximum Freely Suspended Length (ft[mm]):	331[101]
Maximum Travelling Height(ft[mm]):	662[202]
Maximun Running Speed(m/s):	10

Acceleration:	
Operating Temperature(°C):	-20 to +60
Recommended Loop Diameter(mm):	392[±100]
Cable Net Weight Approx. (lbs/ft [kg/m]):	0.7[1.1]
Overall Dimensios Approx. (W/H, in [mm]):	2.58 / 0.39[65.6 / 9.8]
Copper Content.(lbs/kft [kg/km]):	186.07[277.00]
Flame property:	FT1

THE ELECTRICAL PROPERICAL:

Maximum Voltage:	300V
Twisted Pair Attenuation Characteristics.(dB/100m):	
Coaxial Cable Attenuation Characteristics.(dB/100m):	
Fiber Optic Cable Attenuation Characteristics.(dB/100m):	
Coaxial Cable Transfer Impedance.(Ω/km):	
The conductor resistance of the 14 AWG(Ω/km):	≤8.88
The conductor resistance of the 18 AWG(Ω/km):	≤22.4
The conductor resistance of the 20 AWG(Ω/km):	≤35.7

CERTIFICATION & STANDARDS

Certification:	 
CSA File Number:	253817
CSA Standard:	CSA C22.2 No.49
UL Standard:	UL 62