




QI TECH INC.
a subsidiary of Changshun

QI TECH INC.
7410 Ambassador Row, Dallas, Texas 75247
www.qitechinc.com

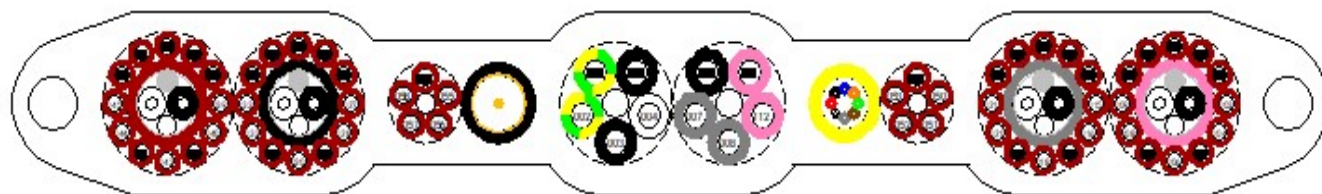

PRODUCT INFORMATION

BASIC CABLE INFORMATION:

Part Number:DLB4777

Type and Specification: ETP 10-14AWG+58-18AWG+4-2-18AWG+75-5+8-(9/125µm)

Packing Information: 300 meter per reel

Cable Color: Gray.

APPLICATION:

Elevator suspension cable for indoor and panoramic elevators.

INSTALLATION:

To comply with the correct installation procedures please refer to the Changshun Product Catalog which is available separately, for the DLB4777 cable ,secure it with the PX25500AV4-B nylon cable clamp during mounting.

THE COMPOSITION STRUCTURE AND SPECIFIC INFORMATION OF CABLE ARE AS FOLLOWS:

Component Core Wire	10/14AWG	58/18AWG	7 Shielded Pairs /20 AWG	1 Coaxial Cable	8 Optical Fiber(50/125µm)	Strength Member
Material						Aircraft Steel Wire Rope
Conductor Material	TR Soft Copper Wire	TR Soft Copper Wire	TR Soft Copper Wire	Copper - Clad Steel		
Insulation Material	PVC Class 4	PVC Class 4	PVC Class 4	UBEC 180		
Shielded Material			Aluminum Foil	Aluminum Foil		
Inner Sheath Material			PVC Class 1.5	PVC Class 1.5		
Outer Sheath Material			PVC Class 1.5			

Note: The diameter of the wire rope is ϕ 4.0mm.

THE CONDUCTOR NUMBERING ARE AS FOLLOWS:

Size	Conductor Number And Color
14AWG	Yellow and Green 001 to 002、Black 003、Black 005、Black 006、White 004、Gray 007 to 008、Pink 111 to 112
18AWG	Red 001 to 058
Shielded Pair /20AWG	Black/White Pair

THE MECHANICAL PROPERTIES:

Maximum Freely Suspended Length (ft[mm]):	509[155]
Maximum Travelling Height(ft[mm]):	1018[310]
Maximun Running Speed(m/s):	10

Acceleration:	
Operating Temperature(°C):	-20 to +60
Recommended Loop Diameter(mm):	548[±100]
Cable Net Weight Approx. (lbs/ft [kg/m]):	1.8[2.7]
Overall Dimensios Approx. (W/H, in [mm]):	4.25 / 0.54[108.0 / 13.7]
Copper Content.(lbs/kft [kg/km]):	476.49[709.20]
Flame property:	FT1

THE ELECTRICAL PROPERICAL:

Maximum Voltage:	300V
Twisted Pair Attenuation Characteristics.(dB/100m):	
Coaxial Cable Attenuation Characteristics.(dB/100m):	
Fiber Optic Cable Attenuation Characteristics.(dB/100m):	
Coaxial Cable Transfer Impedance.(Ω/km):	
The conductor resistance of the 14 AWG(Ω/km):	≤8.88
The conductor resistance of the 18 AWG(Ω/km):	≤22.4
The conductor resistance of the 20 AWG(Ω/km):	≤35.7

CERTIFICATION & STANDARDS

Certification:	 
CSA File Number:	253817
CSA Standard:	CSA C22.2 No.49
UL Standard:	UL 62