




**QI TECH INC.**  
a subsidiary of Changshun

QI TECH INC.  
7410 Ambassador Row, Dallas, Texas 75247  
www.qitechinc.com

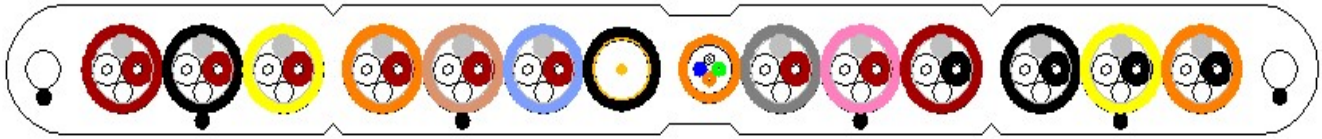

## PRODUCT INFORMATION

### BASIC CABLE INFORMATION:

Part Number: DLB5045

Type and Specification: ETP 12-2-20AWG+75-5+4-(50/125μm)

Packing Information: 300 meter per reel

Cable Color: Gray.

### APPLICATION:

Elevator suspension cable for indoor and panoramic elevators.

### INSTALLATION:

To comply with the correct installation procedures please refer to the Changshun Product Catalog which is available separately, for the DLB5045 cable, secure it with the PX25500AV4-B nylon cable clamp during mounting.

### THE COMPOSITION STRUCTURE AND SPECIFIC INFORMATION OF CABLE ARE AS FOLLOWS:

Component Core Wire	12 Shielded Pairs /20 AWG	1 Coaxial Cable	4 Optical Fiber(50/125μm)	Strength Member
Material				Aircraft Steel Wire Rope
Conductor Material	TR Soft Copper Wire	Copper - Clad Steel		
Insulation Material	PVC Class 4	UBEC 180		
Shielded Material	Aluminum Foil	Aluminum Foil		
Inner Sheath Material	PVC Class 1.5	PVC Class 1.5		
Outer Sheath Material		PVC Class 1.5		

Note: The diameter of the wire rope is  $\phi$  3.0mm.

### THE CONDUCTOR NUMBERING ARE AS FOLLOWS:

Size	Conductor Number And Color
Shielded Pair /20AWG	Red/White Pair Red/Black Pair

### THE MECHANICAL PROPERTIES:

Maximum Freely Suspended Length (ft[mm]):	538[164]
Maximum Travelling Height(ft[mm]):	1076[328]
Maximum Running Speed(m/s):	10
Acceleration:	
Operating Temperature(°C):	-20 to +60
Recommended Loop Diameter(mm):	372[±100]
Cable Net Weight Approx. (lbs/ft [kg/m]):	1.1[1.7]

Overall Dimensios Approx. (W/H, in [mm]):	4.05 / 0.37[102.9 / 9.3]
Copper Content.(lbs/kft [kg/km]):	93.20[138.72]
Flame property:	FT1

THE ELECTRICAL PROPERICAL:

Maximum Voltage:	300V
Twisted Pair Attenuation Characteristics.(dB/100m):	
Coaxial Cable Attenuation Characteristics.(dB/100m):	
Fiber Optic Cable Attenuation Characteristics.(dB/100m):	
Coaxial Cable Transfer Impedance.(Ω/km):	
The conductor resistance of the 14 AWG(Ω/km):	≤8.88
The conductor resistance of the 18 AWG(Ω/km):	≤22.4
The conductor resistance of the 20 AWG(Ω/km):	≤35.7

CERTIFICATION & STANDARDS

Certification:	 
CSA File Number:	253817
CSA Standard:	CSA C22.2 No.49
UL Standard:	UL 62